



SD 540 VFD 5-H

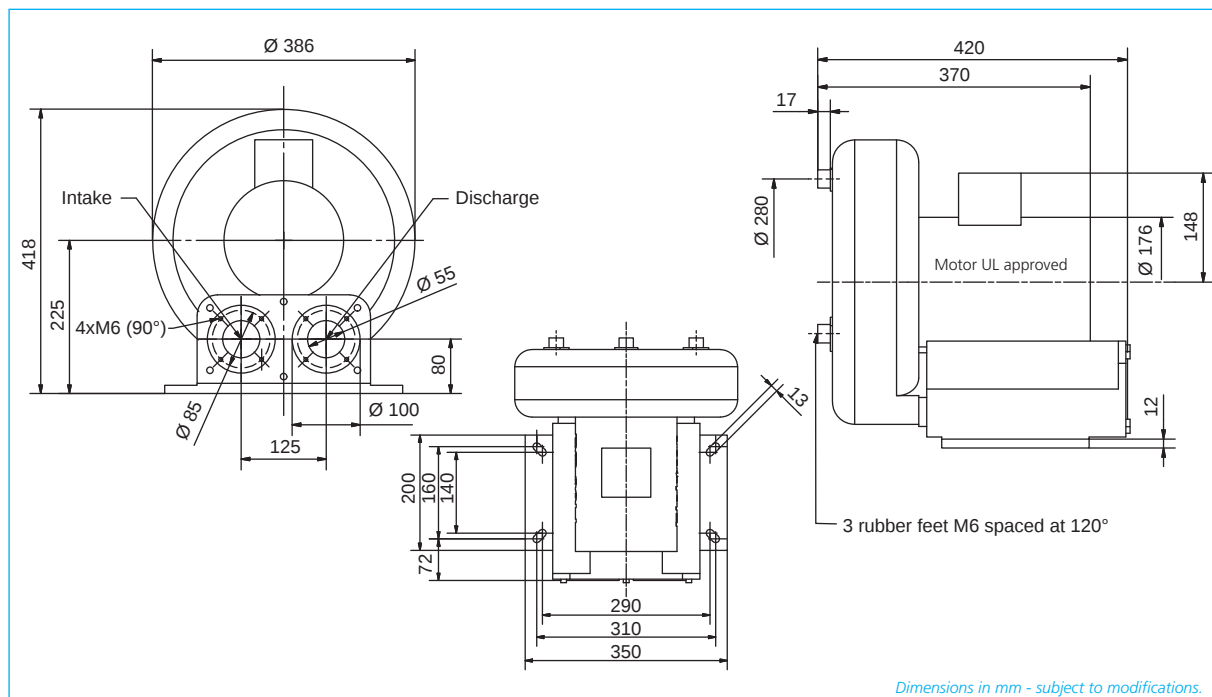


Delivery includes inlet and outlet flanges NPT 2".

Type	Efficiency class 	Frequency Hz	Maximum performance when used as blower		Maximum performance when used as extractor		Motor ratings				Weight (approx.) lb
			$\dot{V}$ max. SCFM	Δp_t max. in. H ₂ O	$\dot{V}$ max. SCFM	Δp_t max. in. H ₂ O	Rated output hp	Voltage V	Current A	RPM min ⁻¹	
SD 540 VFD 5-H	NEMA Energy Efficient	60	148	137	148	120	3,5	265/460	8,0/4,65	3480	78

Pressure

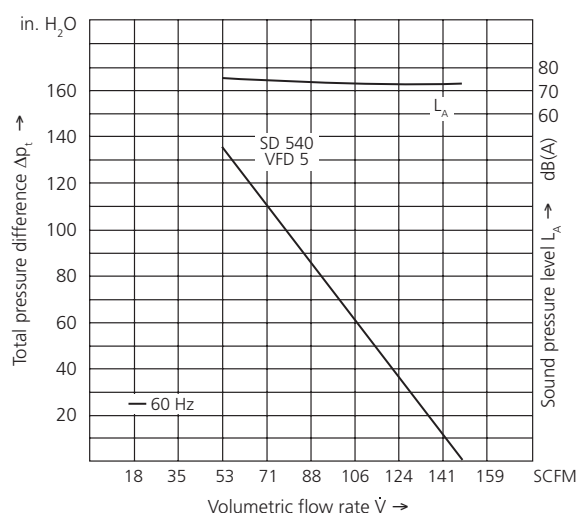

Vacuum

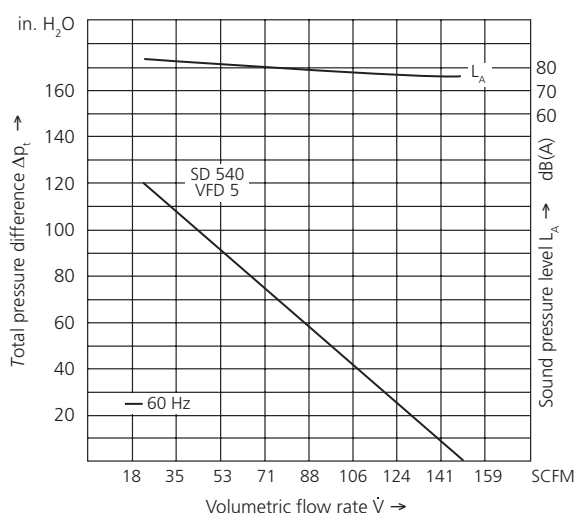

Elektorr
airsystems gmbh

Hellmuth-Hirth-Str.2
D-73760 Ostfildern
Germany
sales@elektorr.com
www.elektorr.com

FE
Fuji Electric

Fuji Electric Corp. of America
47520 Westinghouse Drive
Fremont, CA 94539
USA
x-fea-rc-group@fujielectric.com
www.america.fujielectric.com