


FKC - Differential Pressure (flow) Transmitter for High Static Pressure

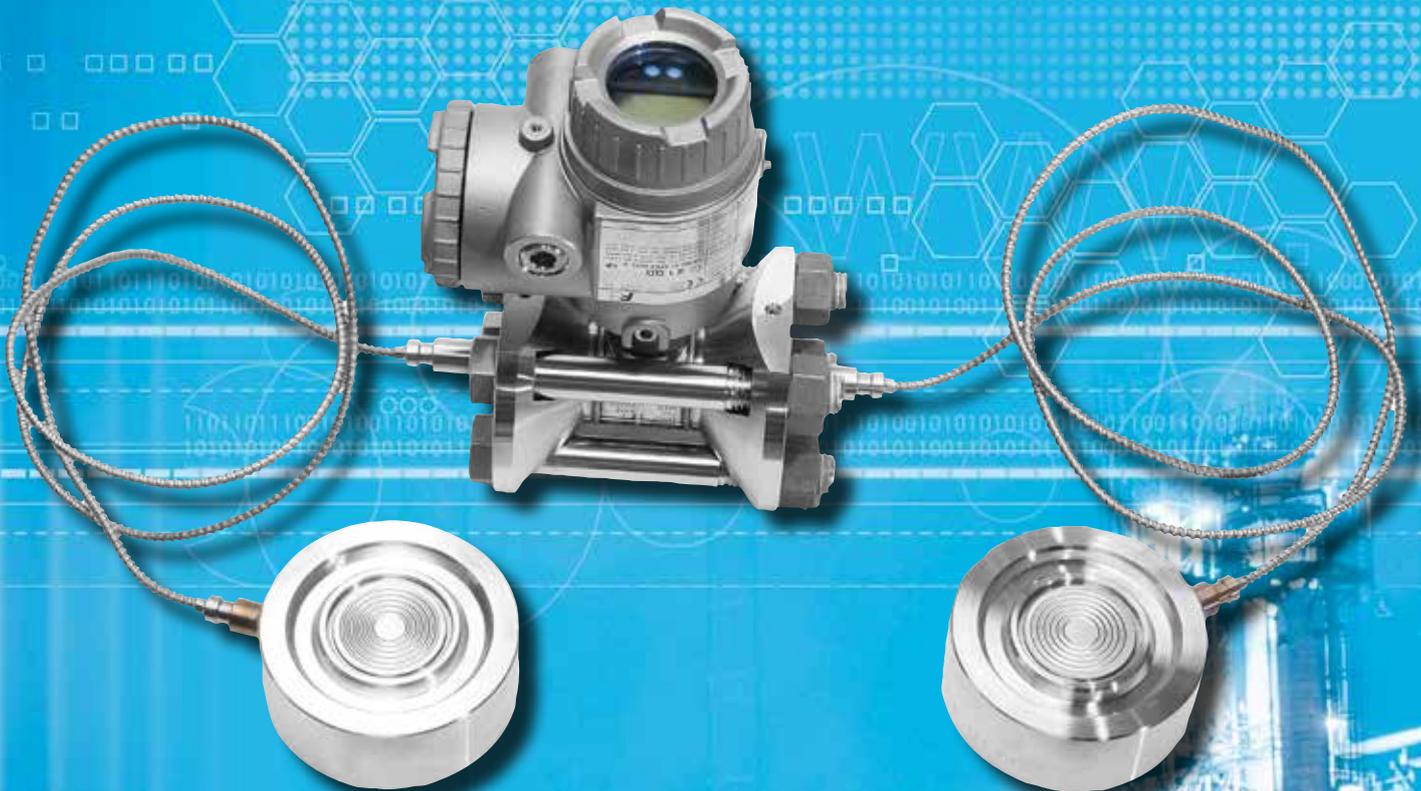

Solutions for specific customer applications :

Based on extensive experience of supplying transmitters for Oil & Gas applications, Fuji Electric France, is proud to announce the release of its latest Differential Pressure as a direct response to our customer's requirement in high pressure applications that are traditionally found in Oil & Gas flow measurement.

The experience and technical capability that we built into the new transmitter enables it to measure differential pressures of 130mbar at static pressures of up to 15 000 Psi (1035 bar), typically found in top side and subsea applications.

Measuring principle :

The transmitter utilizes a unique micromachined capacitive silicon sensor with state of the art microprocessor technology to provide exceptional performance and functionality. The silicon sensor is assembled floating in measuring cell neck, which allows extreme high line pressures and improves the static pressure characteristics.

Robust construction :

The design is based on an all welded construction, where the welded assembling of the process covers on the measuring cell replaces the gaskets. Adapted SS 660 bolting and the specific process covers – NACE compatible – ensure that the required mechanical strength to the assembly is certified according to a PED category IV module H1.

Performance Specifications

Accuracy rating : (including linearity, hysteresis and repeatability)	For spans greater than 1/10 of URL : $\pm 0.1\%$ of span
Stability	$\pm 0.1\%$ of upper range limit (URL) for 3 years
Ambient temperature effect	Zero : $\pm (0.1 + 0.025 \times \text{URL} / \text{span})$ in % of URL / 28°C Total : $\pm (0.125 + 0.025 \times \text{URL} / \text{span})$ in % of URL / 28°C Double the effects for diaphragm material code "H" (7th digit in codes symbols)
Static pressure effect	Zero : $\pm 0.1\%$ of URL / 10 MPa Span : 0 to -0.3 % of span / 10 MPa Double the effects for diaphragm material code "H" (7th digit in codes symbols)
Supply voltage effect	Less than 0.05% of calibrated span per 10V
RFI effect	Less than 0.2% of URL for the frequencies of 20 to 1000MHz and field strength 30 V/m when electronics covers in place. (Classification : 2-abc : 0.2% span per SAMA PMC 33.1)
Mounting position effect	Zero shift : Less than 0.12kPa {1.2m bar} for a 10° tilt in any plane. No effect on span. This error can be corrected by adjusting Zero after installation.
Vibration effect	< $\pm 0,25\%$ of spans for spans greater than 1/10 of URL. Frequency 10 to 150Hz, acceleration 39,2m/sec ²
Dielectric strength	500V AC, 50/60Hz 1 min, between circuit and earth.
Insulation resistance	More than 100MΩ at 500V DC
Turn-on time	4 seconds

Specifications in case of square root output

Accuracy rating	Output 50 to 100% : $\pm 0,1\%$ of span 20 to 50% : $\pm 0,25\%$ of span 10 to 20% : $\pm 0,5\%$ of span
Ambient temperature effect	Shift at 20% output point : $\pm (0,3 + 0,25 \times \text{URL} / \text{span})$ in % of URL / 28°C
Low flow cut-off	Customer configurable for any point between 0 to 20% of output.


Physical Specifications

Process connections	1/4" NPT, autoclave 9/16 - 18 UNF - 2B, others upon request.
Wetted parts materials	Diaphragm SS 316L, Hast.C 276, Others : SS 316L, Hast.C 276, Duplex, Inconel 625
Non wetted parts	Electronics housing : - Low copper die-cast aluminum alloy (standard), finished with epoxy / polyurethane double coating - SS 316 Bolts / nuts : SS 660
Ambient temperature	-10 to 85°C
Process temperature	-10 to 120 °C
Remote seal designs	To avoid hydrate formation for subsea applications, remote seals can be assembled on the DP transmitter. Possible process connections via remote seals according API, RTJ standards or according customer design.

Code Symbols

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	DESCRIPTION
F	K	C					4	-		C			-	W	W	Smart, 4-20 mAdc + Fuji/Hart™ digital signal
																Electrical connection
																1/2"-14 NPT
																M 20 x 1,5
																Max working pressure (static pressure)
																Test pressure
																575 bar
																690 bar
																860 bar
																1035 bar
																860 bar (12 474 Psi)
																1030 bar (14 939 Psi)
																1285 bar (18 638 Psi)
																1545 bar (22 408 Psi)
																Range (mbar)
																Min
																Max
																0 - 130
																0 - 320
																0 - 1300
																0 - 5000
																0 - 30000
																Wetted parts material
																All wetted parts in SS 316L
																Measuring cell wetted parts in Hast C 276 - process cover in SS316L
																Indicator
																Arrester
																Communication type
																No
																No
																4/20 mA - Hart™
																LCD, 0-100%
																No
																4/20 mA - Hart™
																LCD, Custom scale
																No
																4/20 mA - Hart™
																LCD, Custom scale
																Yes
																4/20 mA - Hart™
																No
																Yes
																Modbus RS 485
																Approvals for hazardous locations (consult FUJI for availability)
																None (standard)
																Flameproof housing ATEX Ex II 2 GD - EEx d IIC T5/T6
																Intrinsic Safety ATEX Ex II 1 GD - EEx ia IIC T4/T5
																FM - Flameproof housing Class I, Division 1, Group B,C,D
																Dust ignitionproof Class II/III, Division 1, Group E,F,G - (elec. conn. code "T" only)
																FM - Intrinsic safety Class I, II, III, Division 1, Group A,B,C,D,E,F,G
																Non incentive Class I,II,III, Division 2, Group A,B,C,D,F,G
																Combined ATEX Ex II 2 GD - EEx d IIC T5/T6 & ATEX Ex II 1 GD - EEx ia IIC T4/T5
																Mounting bracket (SS)
																Tag plate
																Electronics housing
																Without
																Aluminium
																SS 316L
																Aluminium
																Without
																SS 316
																SS 316L
																SS 316
																Fill fluid
																Specific oil fill for cell
																Specific oil fill for cell. Wetted parts and bolting in conformity with NACE
																Welded process cover design
																Process cover bolts/nuts in ASTM A 453 grade 660
																Process connection
																A
																1/4" NPT
																B
																1/2" NPT (not recommended for high static pressure)
																C
																13/16 - 16 UNF - 2B / SF562CX20
																D
																9/16 - 18 UNF - 2B / F250C
																E
																9/16 - 18 UNF - 2B / SF375CX20
																F
																3/8 - 24 UNF - 2B / Speedbite SW 125
																G
																7/16 - 20 UNF - 2B / SF250CX20

Outline dimensions

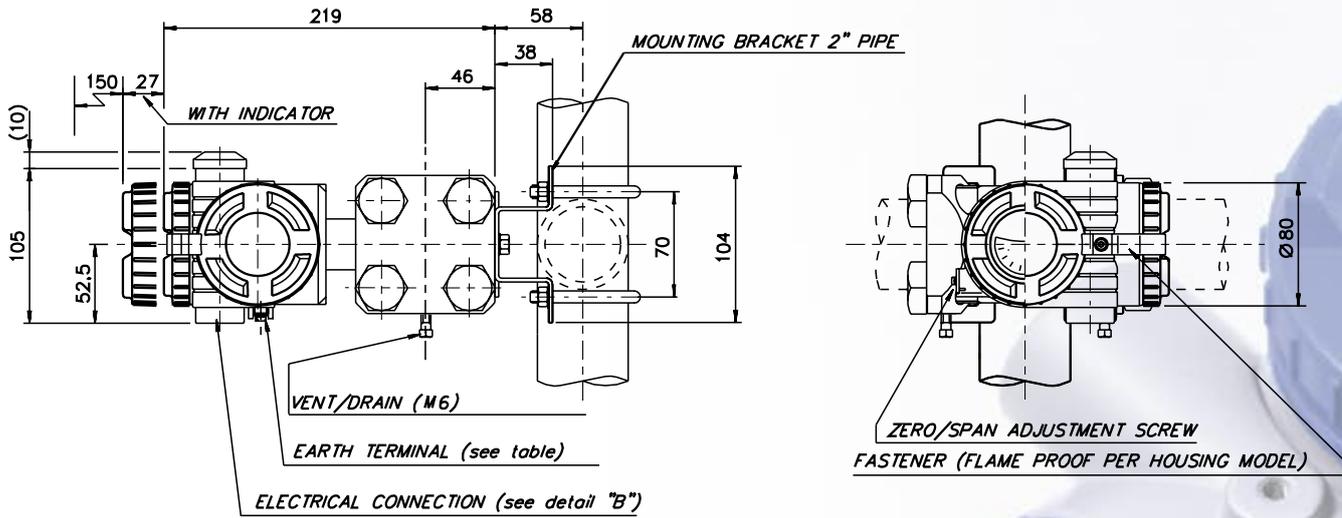


PROCESS CONNECTIONS


13/16-16 UNF - 2B SF562 CX20 - for 9/16 MP AUTOCLAVE CONNECTIONS

9/16-18 UNF - 2B F 250C - for 1/4 HP AUTOCLAVE CONNECTIONS

9/16-18 UNF - 2B SF 375 CX20 - for 3/8 MP AUTOCLAVE CONNECTIONS

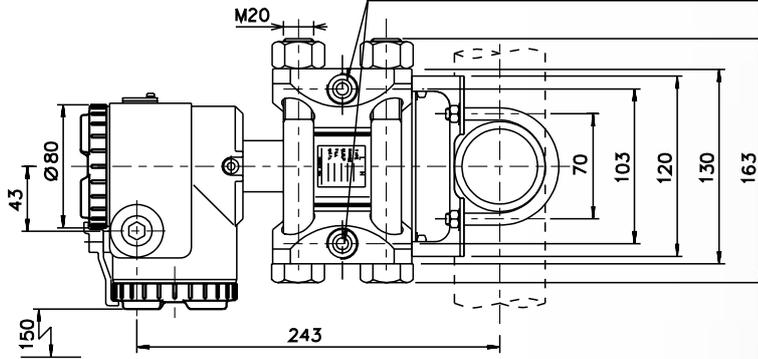

DETAIL "B"



TABLE

CONDUIT CONN.			EARTH TERMINAL
D	E	F	
1/2-14NPT	16	5	N°8 - 32UNC
M20x1.5	16	5	M4

FE Fuji Electric

Fuji Electric France S.A.S.

46 rue Georges Besse - Z.I du Brézet

63039 Clermont Ferrand cedex 2 - FRANCE

Tel. +33 4 73 98 26 98 - Fax +33 4 73 98 26 99

E-mail : sales.dpt@fujielectric.fr - Web : www.fujielectric.fr

Fuji Electric can accept no responsibility for possible errors in catalogues, brochures or other printed material. Fuji Electric reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. All rights reserved.